

GALVANIZED CHAIN LINK

- The chain link is made of woven wires forming diamond-shaped links of variable dimension. Manufactured with wire of a minimum strength of 400 N/mm². The rolls are provided with unrolling wire and paper protection.
- Tolerance of the diameter of the wire: 5-10%
- The chain link is suitable for parks, gardens or private properties in residential areas, rural areas, industrial areas, tennis courts, etc.

| \bigcirc | GALVANIZED |
|------------|------------|
| \bigcirc | GALVANIZEL |

| TYPE | AVAILABLE HEIGHTS | | | | | | | |
|-------|-------------------|------|------|------|------|------|------|------|
| 40-14 | 1m00 | | 1m50 | | 2m00 | | | |
| 50-14 | 1m00 | 1m20 | 1m50 | 1m80 | 2m00 | 2m50 | 3m00 | 4m00 |
| 50-16 | 1m00 | | 1m50 | | 2m00 | | | |



COATED CHAIN LINK

- The chain link is made of woven wires forming diamond-shaped links of variable dimension. Manufactured with wire of a minimum strength of 400 N/mm². The rolls are provided with unrolling wire and paper protection.
- Tolerance of the diameter of the wire: 5-10%
- The chain link is suitable for parks, gardens or private properties in residential areas, rural areas, industrial areas, tennis courts, etc.

| | | | | | | GREEN |
|-------|-------------------|------|------|------|------|-------|
| TYPE | AVAILABLE HEIGHTS | | | | | |
| 40-17 | 1m00 | | 1m50 | | 2m00 | |
| 50-17 | 1m00 | 1m20 | 1m50 | 1m80 | 2m00 | 3m00 |
| 50-19 | | | 1m50 | | 2m00 | |
| 50-20 | | | 1m50 | | 2m00 | |



COATED ELECTRO-WELDED MESH


- Orthogonal and plastic coated electrowelded mesh, manufactured with wires of strength 940 N/mm². At the upper part, the wires are closer together in order to make the mesh stiffer.
- Tolerance of the diameter of the wire: 5-10%
- The coated electro-welded mesh is suitable for parks, gardens or private properties in residential areas, rural areas, industrial areas, etc.

GREEN

| TYPE | AVAILABLE HEIGHTS | | | | | |
|--------|-------------------|------|------|------|--|--|
| 50x50 | 1m00 | 1m50 | 1m80 | 2m00 | | |
| 100x50 | 1m00 | 1m50 | 1m80 | 2m00 | | |





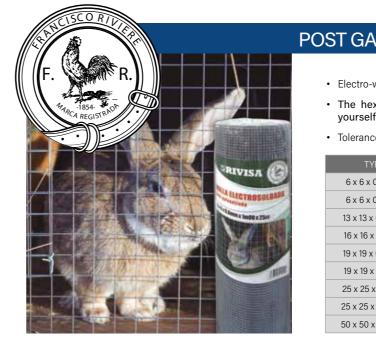

KNOTTED WIRE MESH

• The knotted wire mesh is made of rectangular knotted mesh, wire with triple galvanized protection (240gr Zn/m²), upper and lower diameter of 2,40mm and the rest of the wire has a diameter of 1,90mm. Variable distances between the vertical wires.

| | | \bigcirc | | |
|------------------------------------|--------|------------------------|--------|--|
| DISTANCE BETWEEN VERTICAL WIRES | HEIGHT | Nr HORIZONTAL WIRES | SERIES | |
| 15cm | 1m00 | 8 | | |
| 30cm | IIIIOO | o | LIGHT | |
| 15cm | 1m50 | 18 | | |
| 30cm | IIIIO | 18 | | |
| 15cm | 2m00 | 20 | | |
| 30cm | 211100 | 20 | | |

HEXAGONAL WIRE MESH

- Hexagonal wire mesh made with galvanized wire.
- The hexagonal wire mesh is suitable for poultry farms, animal enclosures and do-it-yourself market.
- Tolerance of the diameter of the wire: 5-10%

| YPE | | ROLL | | | | |
|--------|------|------|------|------|------|-----|
|),70mm | | | 1m00 | 1m50 | | 50m |
|),70mm | | | 1m00 | | | 50m |
|),75mm | 0m60 | 0m80 | 1m00 | 1m50 | | 50m |
|),80mm | 0m60 | 0m80 | 1m00 | 1m50 | | 50m |
|),70mm | 0m60 | 0m80 | 1m00 | 1m50 | | 50m |
|),80mm | | | 1m00 | | | 50m |
|),90mm | | | 1m00 | 1m50 | 2m00 | 50m |

POST GALVANIZED ELECTRO-WELDED MESH

- Electro-welded mesh made with galvanized wire.
- The hexagonal wire mesh is suitable for farms, animal enclosures and do-ityourself market.
- Tolerance of the diameter of the wire: 5-10%

| ′PE | | ROLL | | | | |
|----------|------|------|------|------|------|-----|
| 0,60mm | 0m60 | 0m80 | 1m00 | | | 25m |
| 0,80mm | | | 1m00 | | | 25m |
| 0,90mm | 0m60 | 0m80 | 1m00 | | 1m50 | 25m |
| (1,20mm | | | 1m00 | | | 25m |
| 0,90mm | | | 1m00 | | | 25m |
| (1,40mm | 0m60 | 0m80 | 1m00 | 1m20 | | 25m |
| x 1,60mm | | | 1m00 | | | 25m |
| (2,00mm | | | 1m00 | | | 25m |
| k 2,00mm | | | 1m00 | | | 25m |
| | | | | | | |

GALVANIZED

GALVANIZED

GALVANIZED



COATED ELECTRO-WELDED MESH

- · Coated electro-welded mesh made with galvanized wire.
- The hexagonal wire mesh is suitable for farms, animal enclosures and do-ityourself market.

GREEN

Tolerance of the diameter of the wire: 5-10%

| TYPE | | ROLL | | | |
|------------------|------|------|------|------|-----|
| 13 x 13 x 1,20mm | 0m60 | 0m80 | 1m00 | 1m50 | 25m |
| 16 x 16 x 1,20mm | | | 1m00 | | 25m |
| 19 x 19 x 1,20mm | | | 1m00 | | 25m |

BARBED WIRE

- Barbed wire is made of two supporting wires onto which defensive spikes are knotted.
- Made from high-tensile wire, has a tensile strength (Rt)>900 N/mm².
- Indicated to close agricultural farms and as a complement to reinforce the security.

| | GALVANIZED GREEN |
|----------------------|------------------|
| DESCRIPTION | AVAILABLE COLORS |
| 4 / 1,7 / 15 (E-176) | galvanized 3ZN |
| 15 / 15 | green coated |



GALVANIZED WIRE

- Galvanized wire in rolls.
- Wide range of diameters and lengths for multiple applications: do-it-yourself, gardening, industry, etc.
 GALVANIZED

| | | \bigcirc | |
|------|--------------------------------------|--|--|
| TYPE | | ROLL | |
| 6 | 1kg | 5kg | |
| 8 | 1kg | 5kg | 25kg |
| 10 | | 5kg | 25kg |
| 12 | 1kg | 5kg | 25kg |
| 14 | 1kg | 5kg | 25kg |
| 16 | 1kg | 5kg | 25kg |
| 17 | | 5kg | 25kg |
| 18 | | 5kg | |
| | 6 8 10 12 14 16 17 | 6 1kg 8 1kg 10 1 12 1kg 14 1kg 16 1kg 17 1 | 6 1kg 5kg 8 1kg 5kg 10 5kg 12 1kg 5kg 14 1kg 5kg 16 1kg 5kg 17 5kg 5kg |







GALVANIZED AND PVC COATED WIRE

Galvanized and PVC coated wire in rolls, with a high protection against the corrosion.
Wide range of diameters and lengths for multiple applications: do-it-yourself, multiple inductors at a second seco



| DESCRIPTION | TYPE | ROLL | | |
|----------------------|-------|------|-----|------|
| ed wire Ø2,20/3,00mm | 14/17 | 1kg | 5kg | 25kg |
| ed wire Ø2,70/3,90mm | 16/19 | | 5kg | 25kg |
| ed wire Ø3,00/4,40mm | 17/20 | | 5kg | 25kg |

ANNEALED WIRE

Annealed wire special for industrial and construction applications.Very malleable wire served in rolls of 5kg and 50kg.

| DESCRIPTION | TYPE | ROLL | |
|---------------------|------|------|------|
| recooked wire Ø1,30 | 8 | 5kg | 50kg |

FLAT HEAD NAILS

Flat head nails made of wire.Packed in boxes of 3 kg and 24 kg.

| DESCRIPTION | TYPE | BOX |
|-------------------|------------|------|
| top flat head 3kg | 17 x 17mm | 24kg |
| top flat head 3kg | 20 x 100mm | 24kg |