

**10**  
YEARS OF  
GUARANTEE

## OUTSTANDING

- Gates manufactured from very rigid metal sections
- Robust gate appearance
- Versatile for openings
- Perfect adjustment of the gate leaves
- High quality materials and accessories
- Locking system with anti-levering feature
- Gates approved to the CE standard


## Application places



## Assembly


### ONE-LEAF GATE

Interior right opening (standard)

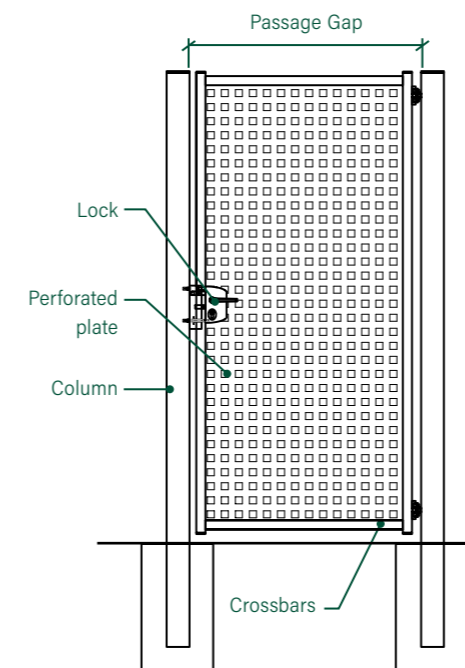

### TWO-LEAF GATE

Interior opening (standard)

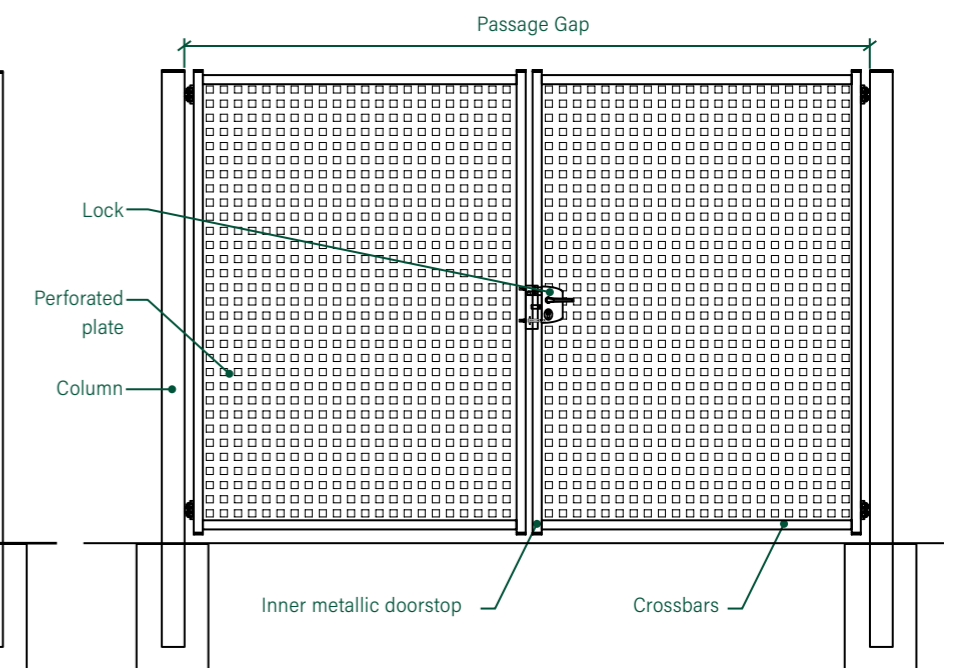



## Technical features

- Sheets formed by a rectangular-profile frame and a die-cut sheet measuring 30x30mm square and 1.5mm thick (see table).
- Support columns of square profile (see table).
- Adjustable hinges.
- Lock provided with an aluminum casing with the option of integrating an electric lock closing system.
- Supplement (bayonet) for hawthorn coupled to the leaf uprights with non-removeable threaded rods

DESCRIPTION		WEIGHT (Kg)	HEIGHT (mm)	TOTAL WIDTH (MM)	PASSAGE GAP (mm)	COLUMNS (mm)	NO. OF LEAVES	BARS (mm)	CROSSBARS (mm)
LENGTH	HEIGHT								
1m00	1m50	27	1470	1259	1059	100x100x2	1	60x40x1.5	60x40x1.5
	2m00	36							
3m00	2m00	120	2000	3310	3110	100x100x2	2	60x40x1.5	60x40x1.5
4m00	2m00	145		4186	3986				

## Accessories standard swing gate



### 180° HINGE WITH 4-DIMENSIONAL ADJUSTMENT

Hot-dip galvanised 180° hinge with 4-dimensional adjustment. Depth, height and distance between post and gate are adjustable after installation.




### METAL BOLT

Assembly consisting of a metal stop anchored to the floor and a latch mounted in the centre of the two leaves to prevent the door from being opened from the outside.



### SECURITY LOCK

Stainless steel security lock for metal doors. The patented stainless steel anchoring system prevents the leaves from separating.



### METAL STOP

Metal stop for swing gates with internal opening.



### INDUSTRIAL LOCK

Industrial lock with aluminium housing and stainless steel mechanism.



## Marking of swing doors


**Rivisa®** complies with the standard: **EN-13241-1:2003** which defines the safety and performance requirements for swing doors when installed in areas accessible to people. **Rivisa®** standard doors successfully passed the "TEST OF DECLARATION OF CONFORMITY" to obtain the certificate.

## Accessory pillar for residential complex

### RESIDENTIAL KIT

Complete installation kit for residential gates, with different combinations that allow aesthetic and functional needs to be met in residential areas. There are several combinations for the residential kit:

- Sliding gate + pedestrian access gate with magnetic lock
- Double leaf mechanised gate + pedestrian access gate with magnetic lock

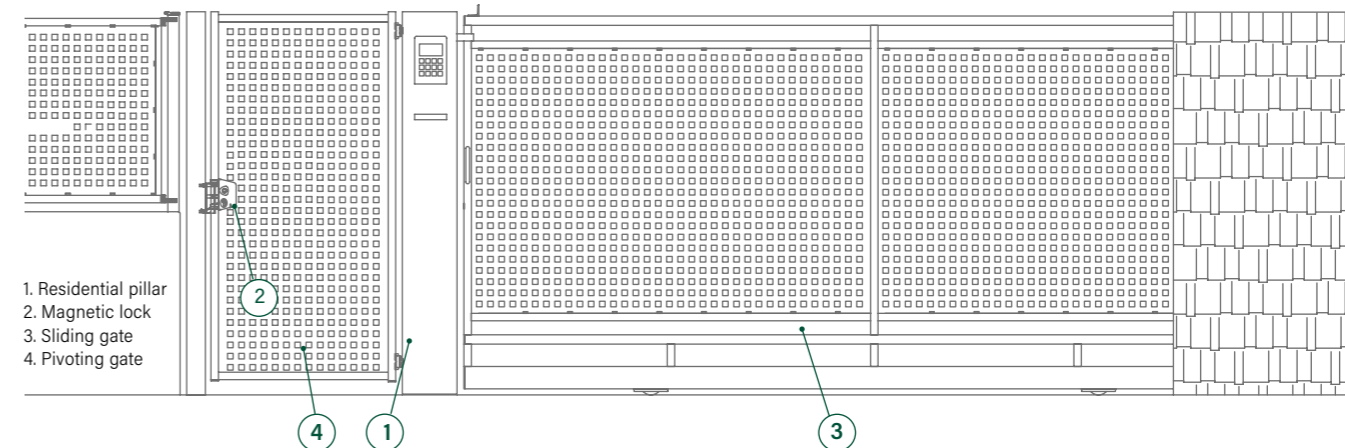

- Residential pillar
- Magnetic lock
- Sliding gate
- Pivoting gate


## Anticorrosion coating

All the materials of the system are hot-dip galvanised and plastic-coated with the **Rivisa® Protecline** anticorrosion coating system.


- Minimum thickness: 100 microns
- Option of applying the **Rivisa® Protecline Plus** plastic coating, which prolongs the useful life of the materials
- Option of applying the **Rivisa® Protecline Plus triple** plastic coating, which prolongs the useful life of the materials
- Available in several colours from the Rivisa RAL chart. Colours:

- Oxiron
- Grey anthracite RAL 7016
- for other colours, see the Rivisa RAL chart

### protecline

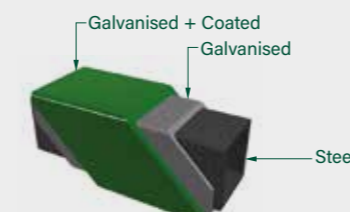

### protecline PLUS



### protecline TRIPLE

