

# SWING GATES ULTRA® ROND

ULTRA ROND SWING DOOR

10  
YEARS OF  
GUARANTEE

## OUTSTANDING

- Gates manufactured from very rigid metal sections
- Robust gate appearance
- Versatile for openings
- Perfect adjustment of the gate leaves
- High quality materials and accessories
- Locking system with anti-levering feature
- Gates approved to the CE standard


## Application places



## Assembly


### ONE-LEAF GATE

Interior right opening (standard)

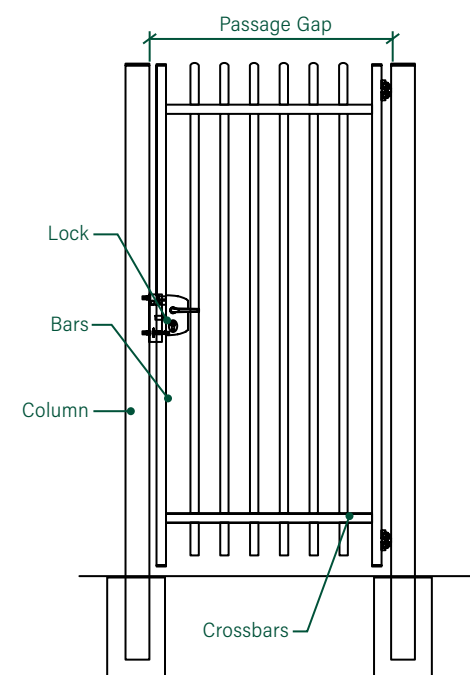

### TWO-LEAF GATE

Interior opening (standard)

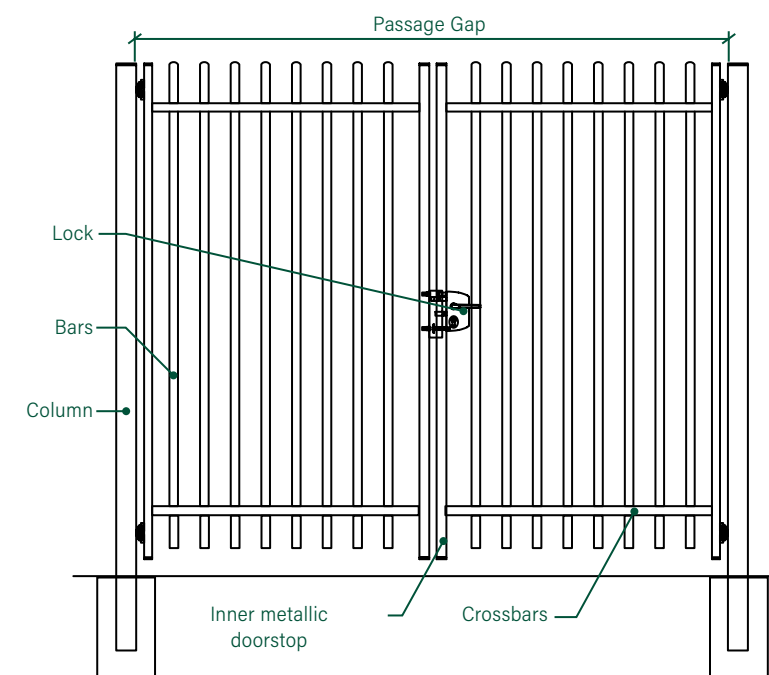

Technical features

- Leaves consisting of rectangular profile frame and bars, Ø25mm.
- Square profile support columns (see table).
- Adjustable hinges that allow enhanced adjustment of the door.
- Lock fitted with stainless steel box and stainless steel mouthpiece (see detail).

DESCRIPTION		WEIGHT (Kg)	HEIGHT (mm)	TOTAL WIDTH (Mm)	PASSAGE GAP (mm)	COLUMNS (mm)	NO. OF LEAVES	PROFILE BARS (mm)	BARS (mm)	CROSSBARS (mm)
LENGTH	HEIGHT									
1m00	1m50	27	1470	1252	1165	100x100x2	1	Ø25x1.5	60x40x1.5	60x40x1.5
	2m00	36	2000							
3m00	2m00	122		3310	3110		2			
4m00	2m00	148		4151	3951					

Accessories standard swing gate




**180° HINGE WITH 4-DIMENSIONAL ADJUSTMENT**  
Hot-dip galvanised 180° hinge with 4-dimensional adjustment. Depth, height and distance between post and gate are adjustable after installation.




**SECURITY LOCK**  
Stainless steel security lock for metal doors. The patented stainless steel anchoring system prevents the leaves from separating.



**INDUSTRIAL LOCK**  
Industrial lock with aluminium housing and stainless steel mechanism.



**METAL BOLT**  
Assembly consisting of a metal stop anchored to the floor and a latch mounted in the centre of the two leaves to prevent the door from being opened from the outside.



**METAL STOP**  
Metal stop for swing gates with internal opening.



DOORS WITH MARKING


**Markinge** of swing doors

**Rivisa®** complies with the standard: **EN-13241-1:2003** which defines the safety and performance requirements for swing doors when installed in areas accessible to people. **Rivisa®** standard doors successfully passed the **"TEST OF DECLARATION OF CONFORMITY"** to obtain the certificate.

Accessory pillar for residential complex

**RESIDENTIAL SET**  
Complete installation kit for residential gates, with different combinations that allow aesthetic and functional needs to be met in residential areas. There are several combinations for the residential kit:


- A.** Sliding gate + pedestrian access gate with magnetic lock
- B.** Double leaf mechanised gate + pedestrian access gate with magnetic lock

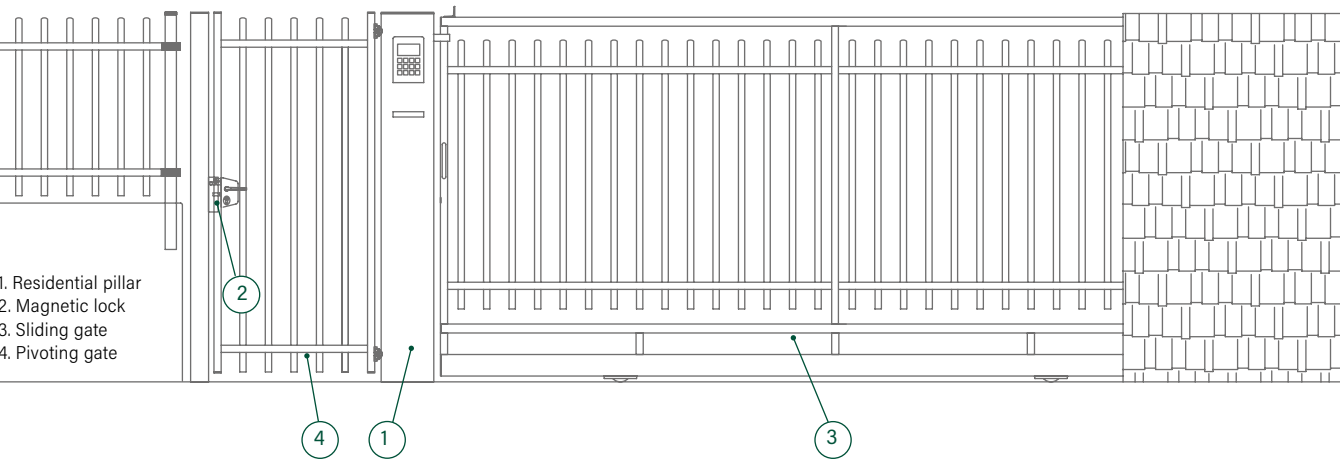



**Anticorrosion coating**


All the materials of the system are hot-dip galvanised and plastic-coated with the **Rivisa® Protecline** anticorrosion coating system.


- Minimum thickness: 100 microns
- Option of applying the **Rivisa® Protecline Plus** plastic coating, which prolongs the useful life of the materials
- Option of applying the **Rivisa® Protecline Plus triple** plastic coating, which prolongs the useful life of the materials
- Available in several colours from the Rivisa RAL chart. Colours:

 White RAL-9016


 Green RAL-6005


 Grey RAL-7016

 For other colours see Rivisa RAL chart





**protecline**

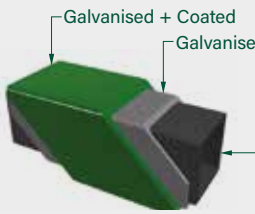



**protecline PLUS**

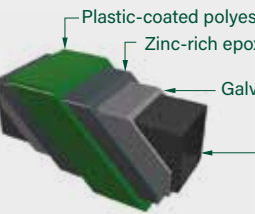



**protecline TRIPLE**

